



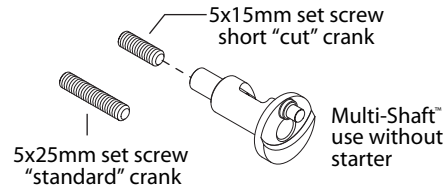

Multi-Shaft™ Setup

The TRX Multi-Shaft includes two set screw lengths for use in various applications. The 25mm set screw is included for "standard" applications, and the 15mm set screw is included for "short" applications.

To install the set screw, put a drop of blue thread-locking compound (not included) on the threads in the Multi-Shaft and use a 2.5mm hex driver to tighten the screw into the Multi-Shaft until snug.

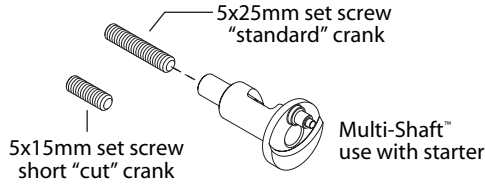

If you have any questions or need technical assistance, call:

1-888-TRAXXAS

(1-888-872-9927) (U.S. residents only)

E-mail: support@Traxxas.com

www.traxxas.com

Form 5221INST Rev 060615



Traxxas, 1100 Klein Road, Plano, TX 75074, Phone: 972-265-8000, Fax: 972-265-8011



Multi-Shaft™ Setup

The TRX Multi-Shaft includes two set screw lengths for use in various applications. The 25mm set screw is included for "standard" applications, and the 15mm set screw is included for "short" applications.

To install the set screw, put a drop of blue thread-locking compound (not included) on the threads in the Multi-Shaft and use a 2.5mm hex driver to tighten the screw into the Multi-Shaft until snug.

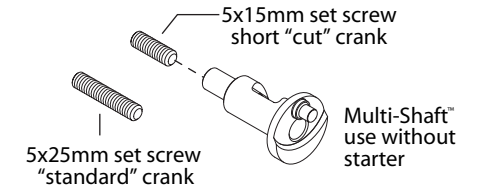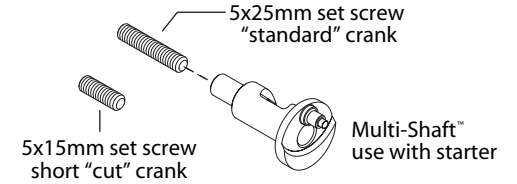

If you have any questions or need technical assistance, call:

1-888-TRAXXAS

(1-888-872-9927) (U.S. residents only)

E-mail: support@Traxxas.com

www.traxxas.com

Form 5221INST Rev 060615



Traxxas, 1100 Klein Road, Plano, TX 75074, Phone: 972-265-8000, Fax: 972-265-8011



Multi-Shaft™ Setup

The TRX Multi-Shaft includes two set screw lengths for use in various applications. The 25mm set screw is included for "standard" applications, and the 15mm set screw is included for "short" applications.

To install the set screw, put a drop of blue thread-locking compound (not included) on the threads in the Multi-Shaft and use a 2.5mm hex driver to tighten the screw into the Multi-Shaft until snug.

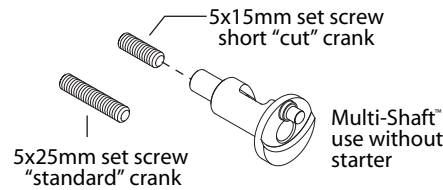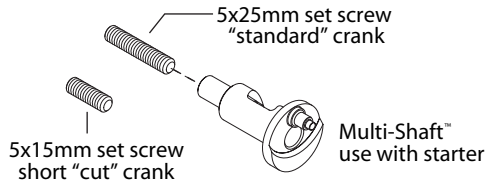

If you have any questions or need technical assistance, call:

1-888-TRAXXAS

(1-888-872-9927) (U.S. residents only)

E-mail: support@Traxxas.com

www.traxxas.com

Form 5221INST Rev 060615



Traxxas, 1100 Klein Road, Plano, TX 75074, Phone: 972-265-8000, Fax: 972-265-8011



Multi-Shaft™ Setup

The TRX Multi-Shaft includes two set screw lengths for use in various applications. The 25mm set screw is included for "standard" applications, and the 15mm set screw is included for "short" applications.

To install the set screw, put a drop of blue thread-locking compound (not included) on the threads in the Multi-Shaft and use a 2.5mm hex driver to tighten the screw into the Multi-Shaft until snug.

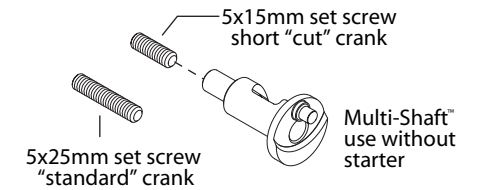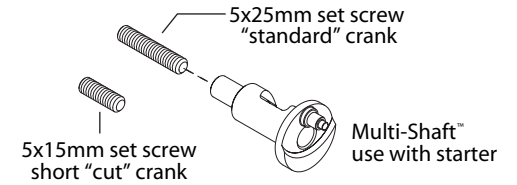

If you have any questions or need technical assistance, call:

1-888-TRAXXAS

(1-888-872-9927) (U.S. residents only)

E-mail: support@Traxxas.com

www.traxxas.com

Form 5221INST Rev 060615

Traxxas, 1100 Klein Road, Plano, TX 75074, Phone: 972-265-8000, Fax: 972-265-8011