




E-MAXX and E-MAXX Brushless Voltage Sensor Installation

Covers Part Number(s):
6523, 6541

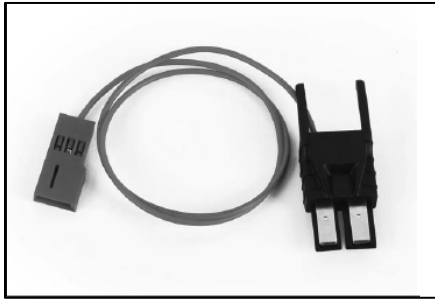

Tools Needed:



- 2.0mm hex wrench

Required:

- Temp Loop 6523
- Voltage Tap 6541

Installation Steps:

1. Using a 2.0mm hex wrench, remove wire cover and upper receiver box cover (A).
2. Route red female plug from temp sensor (6523) out of receiver box (required for installation).
3. Plug the voltage tap into the red female temp sensor connector (B).
4. Reinstall wire cover and upper receiver box cover (add grease to foam pads on receiver box to ensure watertight seal).
5. Connect voltage sensor to battery plug with red wire (C).
6. Secure voltage sensor wire to the positive (red) battery cable with wire tie (included) (D). Cut off excess wire tie.

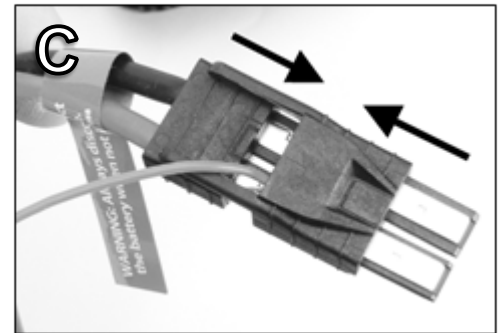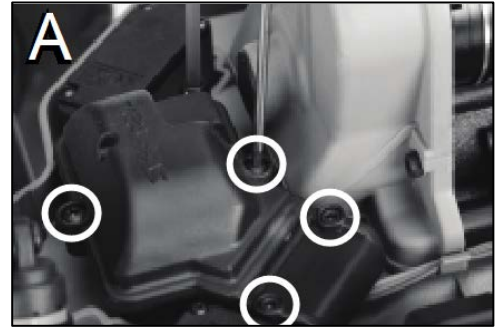

If you have questions or need technical assistance, call Traxxas at

1-888-TRAXXAS

(1-888-872-9927) (U.S. residents only)

TRAXXAS.COM